



## TSBW3A

### 3-function BT wall switch AC 120-277 V



#### Description

The TSBW3A is a Bluetooth wireless wall switch with AC 120-277V power supply. It allows wireless control of Technilight Smart devices, with on/off, dimmer (DIM+) and dimmer (DIM-) functions. The TSBW3A can be used to retrofit a standard wall switch.

#### Features


- 120-277 VAC.
- Ideal for retrofitting existing wall controls (neutral required).
- Quickly control Technilight Smart devices with the touch of a button via Bluetooth.
- Bluetooth 5.0 network technology allows the switch to be connected to one or more lighting groups via the Technilight Smart app.




#### Specifications

<b>Input voltage</b>	AC120-277V
<b>Frequency</b>	50/60Hz
<b>Input current</b>	10mA Max
<b>Bluetooth transmit</b>	100' Max
<b>Radio frequency</b>	2.4GHz ± 75MHz
<b>Bluetooth version</b>	5.0
<b>Housing material</b>	UL 94-5VA
<b>Operating temperature</b>	0°C ~ 40°C, 32°F ~ 104°F
<b>Storage temperature</b>	-30°C ~ 85°C, -22°F ~ 185°F
<b>IP rating</b>	IP20
<b>Color</b>	Plate: White, Housing: Black
<b>Warranty</b>	5 years
<b>Compliance</b>	UL60730, UL1376, RoHS
<b>Safety</b>	Listed LED Controller cULus E547544 DLC: coming soon

## Branchement

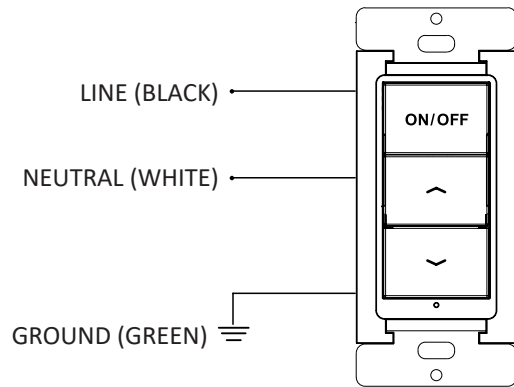

## Dimensions

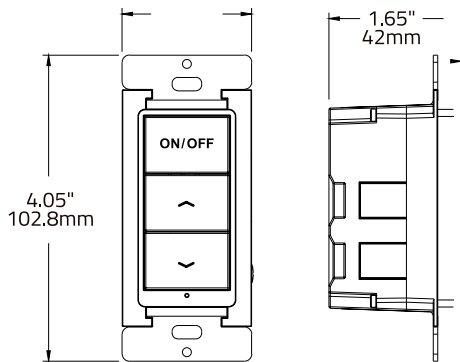

Information subject to change without notice. Pictures for illustration purpose only. rev. 2.5.4

**Technilight**

**/// SMART**

Model: TSBW3A

**3 Key AC Wireless Wall Switch**

Operating Temperature: 0°C to 40°C

Use 14AWG wire rated for at least 75°C

Strip 10mm (±1) insulation, connect or disconnect for field wiring

