

INSTRUCTIONS

1. Install 1 pc CR2032 battery by opening the back cover.
2. Simultaneously press and hold the "DIM" and "ON" buttons for two seconds to enter pairing mode.
3. In Technilight Smart app "switch" page, click to add the switch.
4. Select the light/light group to be controlled by this switch.
5. Select 4 scenes to be controlled by this switch.

TIPS: This Bluetooth device is compatible with Technilight Smart lighting control system only.

IMPORTANT

Battery model #CR2032. The battery can be used for 5 years based on the usage twice a day.

BATTERY INSTALLATION

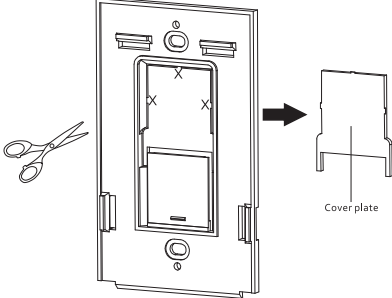
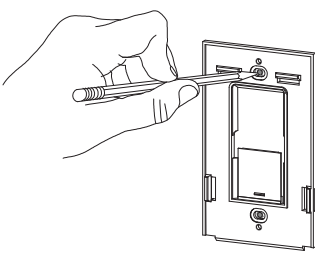
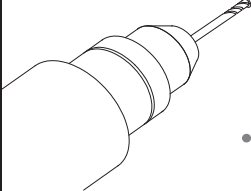
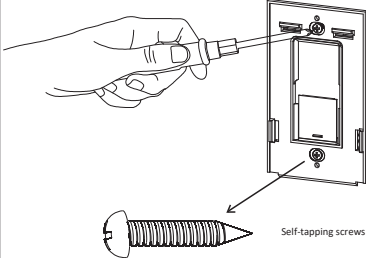
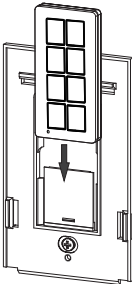
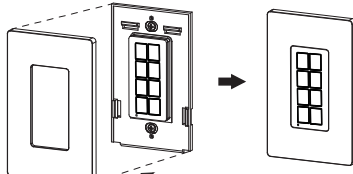
Step 1: Pry up the cover of remote controller with a flat screw driver.	Step 2: Replace the battery with new one.	Step 3: Attach the cover.

BRACKET INSTALLATION

Step 1: Attach the bracket with supplied self tapping screws.	Step 2: Slide remote controller into the bracket.

WALL SURFACE INSTALLATION

Note: The WP needs to be purchased separately

Step 1: Remove the cover plate carefully with scissors. 	Step 2: Mark a position you want to install. 	Step 3: Drill two holes with power drill. 
Step 4: Attach the bracket with supplied self tapping screws. 	Step 5: Slide remote controller into the bracket. 	Step 6: Attach the wallplate. 

How to install Technilight Smart APP?

Download our app:



Technilight Smart
Google play
Android



Technilight Smart
Apple store
iOS

WARRANTY INFORMATION

Our company warranties this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.