



WATT AND CCT SELECTABLE



Specifications TLHBUS240A80

Electrical Specifications


Model No.	TLHBUS240A80
DLC ID	S-D2TB3X
Power (W) ± 10%	180 W - 200 W - 240 W
Input Voltage (V)	120-347 V, 50/60 Hz
Efficacy ± 3%	152 lm/W
Power Factor (PF)	0.9
Dimmable	0-10 V
Surge protection	4 Kv
Total harmonic distortion	15%

Photometric Specifications

CRI	80
CCT	4 000 K / 5 000 K
Beam angle	120°
Light Output ± 3%	180W: 27 360 lm 200W: 30 400 lm 240W: 36 480 lm

Mechanical Specifications

IP Rating	IP66
Material	Aluminum
Lens	Clear (Polycarbonate)
Net Weight	3 kg
Product size (mm)	± Ø324.3 x 172.7 mm
Product size (inch)	± Ø12.8" x 6.8"
Operating Humidity	10% - 90%
Operating Temperature	-40°C ~ 45°C
Lifespan (L70)	60 000 hours

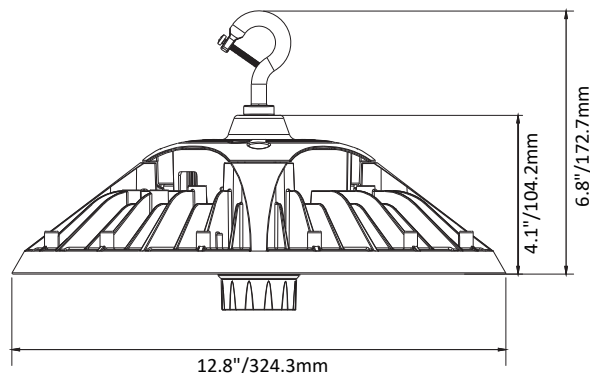

Accessories not included

 HD07VR-MH-BK	Microwaves motion sensor	 HD07VR-PH-BK	PIR motion sensor
 HD05R	Remote control setting for motion sensor	 TLHBUS2AR	Aluminum reflector
 TLHBUS2LS	PC reflector	 TLHBUS2LC	PC reflector cover
 TLHBUS2TU	"U" bracket	 BLD-RM60R	Emergency lighting battery 100/347 V (Optional remote)

Product Description:

- Lightweight lamp body for easier installation in high ceiling areas.
- Polycarbonate lens with 120° projection. 60° and 90° lens available on request.
- 600 mm stainless steel suspension kit included.
- 2 meters power cable.
- 4 kV surge protection.
- Over 70% energy saving compared to conventional lights.

Applications:

Warehouse, workshop, garage, industry, arena and other high ceiling areas.