
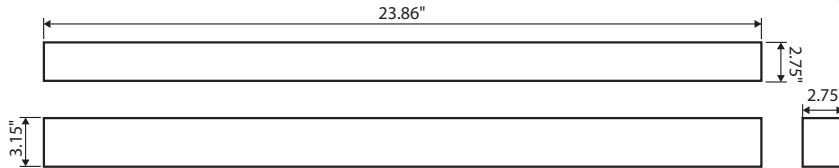
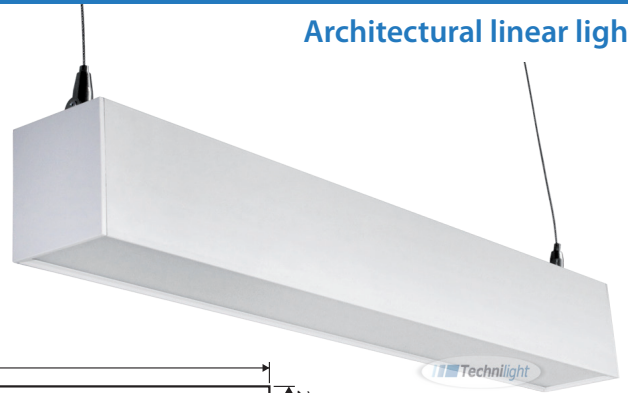


## Architectural linear light

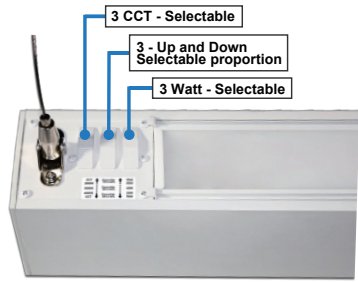

### Specifications TLARLUS2F30AWH

#### Electrical Specifications

Model No.	TLARLUS2F30AWH
DLC ID	N/D
Power (W) selectable $\pm$ 10%	20W / 25W / 30W
Input Voltage (V)	AC 120/347V, 50/60Hz
Efficacy $\pm$ 3%	115 lm/W
Power Factor (PF)	0.9
Surge protection	4 Kv
Total harmonic distortion	< 20%
Dimmable	0-10V

#### Photometric Specifications

CRI	>80	
CCT selectable	3500K / 4000K / 5000K	
Beam angle	120°	
Light Output $\pm$ 3%	20W: 2300 lm	25W: 2875 lm
	30W: 3450 lm	

#### Mechanical Specifications

IP Rating	IP20
Material	Aluminum + PC
Lens	Frosted
Net Weight	1.50 kg
Product size (mm)	$\pm$ 606 x 70 x 80 mm
Product size (inch)	$\pm$ 23.86" x 2.75" x 3.15"
Operating Humidity	10% to 90%
Operating Temperature	-20°C to 45°C
Lumen maintenance	>82% at 100 000 hours

#### Accessories (not included)

	Suspension cables		Suspension connecting kit		Junction support to join 2 luminaires
	Surface installation kit		Wall installation kit		Architectural "L" shape luminaire (Right angle)
	Architectural "L" shape luminaire (Left angle)		Architectural "X" shape luminaire		Architectural "T" shape luminaire

#### Product description:

- Modular luminaire available in 2, 4 and 8 feet.
- Wide supply voltage supply range 120 / 347 V.
- Selectable power and CCT.
- Direct and indirect lighting.  
Selectable up/down configuration : 0% up 100% down / 30% up 70% down / 50% up 50% down.
- Its versatile design makes installation easy which reduces installation time and costs.
- Savings on energy consumption compared to conventional lighting.
- Warranty: 5 years.
- Compatible with most sensors.
- 3 installation options: suspended, surface mount or wall mount, accessories not included.
- Maximum of 420W at 120V, 840W at 240V and 1200W at 347V per circuit.

#### Applications:

Suitable for offices, schools, shops, showrooms etc.